

PRODUCT

Zago

VERSION



KIT


IT p.134 / UK p.148 / FR p.162 / ES p.176 / DE s.190

WARMBOOK



p.210

	IT	UK	FR	ES	DE
	- Acciaio	- Steel	- Acier	- Acero	- Stahl
	- Staffe a parete, stessa finitura del radiatore - Valvola di sfioro - Tappo cieco	- Wall brackets, same finishing as the radiator - Exhaust valve - Blind cap	- Supports muraux, même finition du radiateur - Vanne de décompression - Bouchon borgne	- Soportes de pared: el mismo acabado que el radiador - Purgador - Tapón ciego	- Wandbügel, dieselbe Ausführung des Heizkörpers - Entlüftungsventil - Verschlussstopfen
	- Bianco RAL 9010 lucido - Colourbook Scirocco H	- White RAL 9010 gloss - Colourbook Scirocco H	- Blanc RAL 9010 brillant - Colourbook Scirocco H	- Blanco RAL 9010 brillante - Colourbook Scirocco H	- Weiß RAL 9010 Hochglanz - Colourbook Scirocco H
	- Fornito con resistenza elettrica completa di cavo e spina Schuko - A richiesta disponibile con termostato, p.123	- Furnished with electrical heating element complete with cable and Schuko plug - On demand available with thermostat, p.137	- Fourni avec résistance électrique standard en classe II avec câble électrique et prise Schuko - Sur demande disponible avec thermostat, p.151	- Se suministra con resistencia eléctrica, con cable y enchufe Schuko - Disponible bajo petición con termostato, p.165	- Mit elektrischem Widerstand, komplett mit Kabel und Schukostecker - Auf Anfrage verfügbar mit Raumthermostat, s.179
	- Valvole e detentori, p.124 - Attacchi: 1/2" G - Pressione massima d'esercizio: 5 bar - Disponibile per impianti monotubo - Kit copritubo, p.127 - Massima temperatura d'esercizio: 90°C	- Valves and holders, p.138 - Connections: 1/2" G - Maximum working pressure: 5 bar - Available for single tube installation - Tube cover kit, p.141 - Maximum working temperature: 90°C	- Vannes et raccord réglables, p.152 - Connection: 1/2" G - Pression maximale de service: 5 bar - Disponible pour installations monotube - Kit cache-tube, p.155 - Température maximum d'exercice: 90°C	- Válvulas y llaves de cierre, p.166 - Conexiones: 1/2" G - Presión máxima de trabajo: 5 bar - Disponible para instalaciones monotubo - Kit de cobertura tubo, p.169 - Temperatura máxima de trabajo: 90°C	- Ventil und Drossel, s.180 - Anschlüsse: 1/2" G - Maximaler Betriebsdruck: 5 bar - Einrohr-Anlagen verfügbar - Rohrverkleidungssatz, s.183 - Maximale betriebstemperatur: 90°C

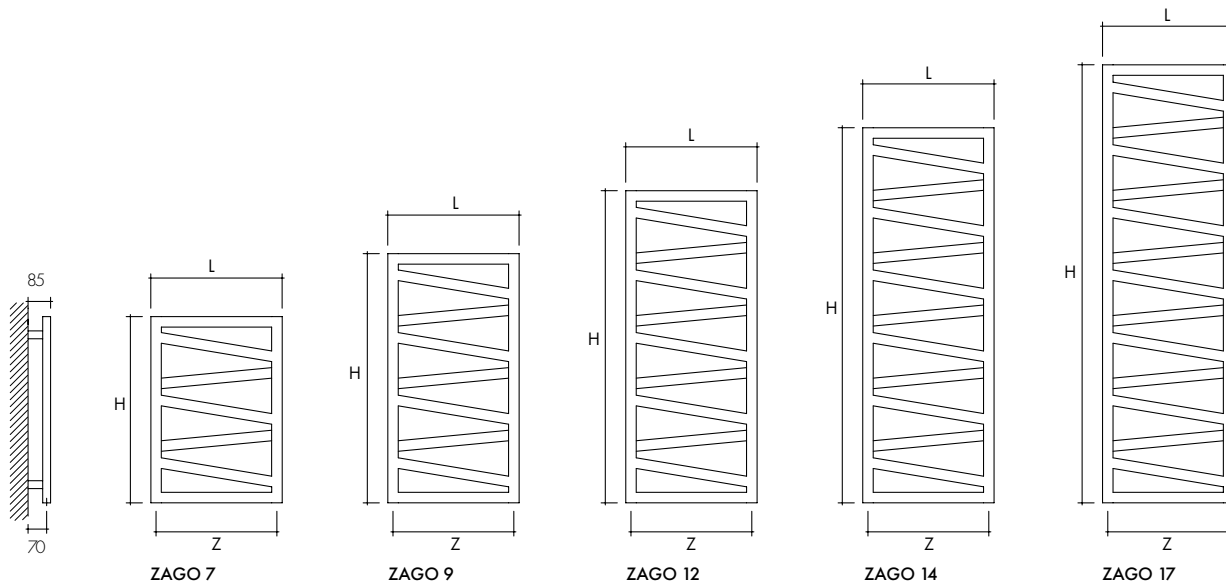

ART.	DIMENSIONI DIMENSIONS			RESEA OUTPUT	CAPACITÀ CAPACITY	PESO WEIGHT	RESISTENZA RESISTANCE	IDRAULICO HYDRAULIC	ELETTRICO ELECTRIC
	L	H	Z	W	lit	Kg	Watt	RAL 9010 BIANCO LUCIDO WHITE POLISHED	COLORE COLOUR
ZAGO 7X50	500	750	460	280	2,14	6,0	300	€	€
ZAGO 9X50	500	990	460	368	2,81	7,6	300	€	€
ZAGO 12X50	500	1230	460	451	3,47	9,2	600	€	€
ZAGO 14X50	500	1470	460	540	4,13	10,9	600	€	€
ZAGO 17X50	500	1710	460	627	4,79	12,5	800	€	€



WI-FI CONNECTABLE

IT p.122 / UK p.136 / FR p.150 / ES p.164 / DE s.178