




	IT	UK	FR	ES	DE
	- Acciaio	- Steel	- Acier	- Acero	- Stahl
	- Staffe a parete - Valvola di sfogo - Valvola termostattizzabile interasse 50 mm, pg 113 - Impianto illuminazione LED	- Wall brackets - Exhaust valve - Thermostatic valve centre-line distance 50 mm, pg 127 - LED lighting system	- Supports muraux - Vanne de décompression - Vanne thermostatique entraxe 50 mm, pg 141 - Système d'éclairage LED	- Soportes de pared - Purgador - Válvula termostattizable batalla 50 mm, pg 155 - Sistema de iluminación LED	- Wandhalterungen - Entlüftungsventil - Thermostat Ventil - Achsabstand 50 mm, pg 169 - LED-Beleuchtungssystem
	- Colourbook Scirocco H	- Colourbook Scirocco H	- Colourbook Scirocco H	- Colourbook Scirocco H	- Colourbook Scirocco H
	- Resistenza elettrica in silicone scaldante, Classe I - Termostato ambiente digitale programmabile, WIRELESS, a pile. IP30 - Ricevitore 1 Canale WIRELESS, tensione 230V-50Hz. IP44	- Electric heating element in silicone, Class I - Room temperature digital programmable thermostat, WIRELESS, with 1.5V batteries. IP30 - 1 Channel WIRELESS receiver, voltage 230V-50Hz. IP44	- Résistance électrique en silicone chauffant, Classe I - Thermostat d'ambiance digitale programmable, WIRELESS, avec piles 1,5V. IP30 - Récepteur WIRELESS à 1 canal, tension 230V-50Hz. IP44	- Resistencia eléctrica en silicona calefactor, Classe I - Termostato de temperatura ambiente digital programable WIRELESS, con pilas 1,5V IP30 - Receptor 1 Canal INALÁMBRICO, tensión 230V-50Hz. IP44	- Elektrisches Heizelement aus Silikon, Klasse I - Digitales und Programmierbares Raumtemperaturthermostat, WIRELESS, mit Batterien. IP30 - 1 Kanal WIRELESS Empfänger, Spannung 230V-50Hz. IP44
	- Attacchi: 1/2" G - Pressione massima d'esercizio: 5 bar - Massima temperatura d'esercizio: 90°C	- Connections: 1/2" G - Maximum working pressure: 5 bar - Maximum working temperature: 90°C	- Connection: 1/2" G - Pression maximale de service: 5 bar - Température maximum d'exercice: 90°C	- Conexiones: 1/2" G - Presión máxima de trabajo: 5 bar - Temperatura máxima de trabajo: 90°C	- Anschlüsse: 1/2 G - Maximaler Betriebsdruck: 5 bar - Maximale betriebstemperatur: 90° C



ART.	DIMENSIONI DIMENSIONS				RESA OUTPUT	CAPACITÀ CAPACITY	PESO WEIGHT	RESISTENZA RESISTANCE	IDRAULICO HYDRAULIC	ELETTRICO ELECTRIC
	L	H	P	Z	W	Lt	Kg	Watt	COLORE COLOUR	COLORE COLOUR
STARLIGHT	350	1550	110	50	510	5,1	25	-		
STARLIGHT_E	350	1550	85	P.E.	620	-	22	600		

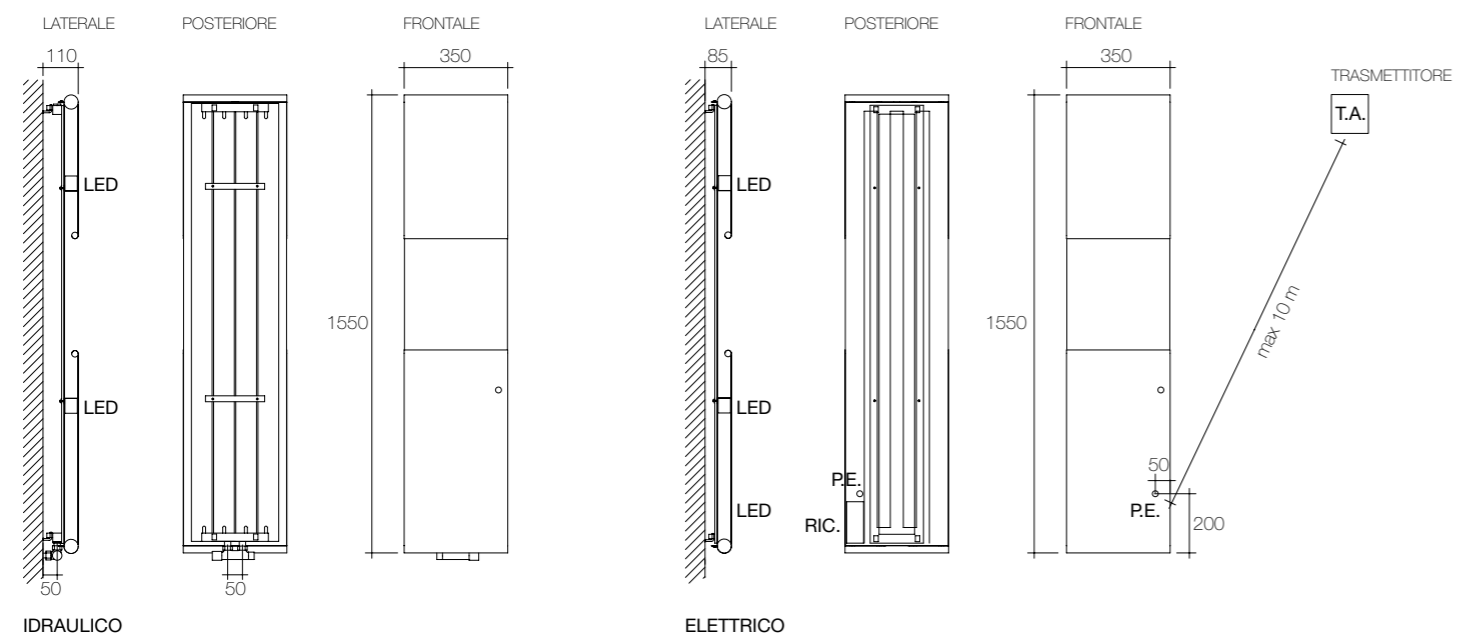